





20kVA Canopied Set



GENERAL

OUTPUT RATINGS

50Hz, 230/240 VOLT, 1 PHASE


YXP20 Prime 20kVA, 20kW ENGINE PERKINS

ALTERNATOR LEROY SOMER



TECHNICAL DATA				
Engine Model	404D-22G		1500RPM	
Cylinders	4	Fuel Cons: 100% Load (I/hr)	5.4	
Cubic Capacity	2.21 Litres	Fuel Cons: 75% Load (I/hr)	4	
Aspiration	Natural	Oil Capacity	10.6 Litres	
Cooling	Water Cooled	Coolant Capacity	7 Litres	
Fuel Tank Capacity	115 Litres	Cooling Air Flow	40.3 L/min	

These ratings are suitable for continuous output at varying load. No overload available on these ratings. Ratings at 0.8pf for 3 Phase, 1.0pf for 1 phase

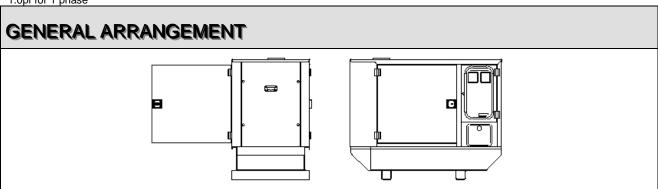

DIMENSIONS AND WEIGHTS					
Length Mm	Width Mm	Height Mm	Weight Kg		
2062	900	1301	985		

Owing to our policy of continuous improvement, we reserve the right to amend specifications without notice. All ratings are at standard ISO conditions.

Registered Office: Yorpower Limited Unit 2 Hurricane Close Sherburn In Elmet LS25 6PB UNITED KINGDOM



T: +44 (0) 1977 688155 F: +44 (0) 1977 688158

E: sales@yorpower.com W: www.yorpower.com