




**YORPOWER**

RATING	MODEL	ENGINE
1250kVA Open Set	YXP1250D6	

## GENERAL

**OUTPUT RATINGS 60Hz,**

**Prime 1250kVA, 1000kW**

**Standby 1375kVA, 1100W**

**ENGINE PERKINS 4012-46TWG2A**

**ALTERNATOR LEROY SOMER**





## TECHNICAL DATA

Engine Model	4012-46TWG2A	Engine Speed	1800RPM
Cylinders	12	Fuel Cons: 100% Load (l/hr)	266
Displacement	45.48 Litres	Fuel Cons: 75% Load (l/hr)	TBC
Coolant Capacity	201 Litres	Oil Capacity	177 Litres
Cooling	Water Cooled	DBA @ 7M	TBC
Fuel Tank Capacity	2000 Litres	Intake System	Turbocharged

These ratings are suitable for Prime Continuous power output at varying load with no limitation on annual hours of operation.  
The Generator will supply 10% overload for 1 in 12 hours.

## GENERAL ARRANGEMENT

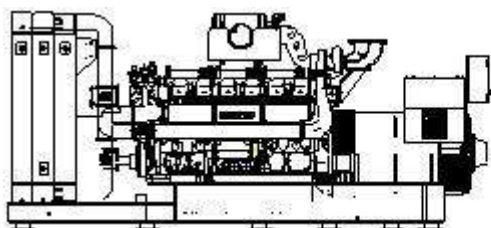

## DIMENSIONS AND WEIGHTS

Length mm	Width mm	Height Mm	Weight Kg
TBC	TBC	TBC	TBC

We reserve the right to amend specifications without notice. All ratings are at standard ISO conditions  
Alternators may vary subject to lead time and availability

Registered Office:  
Yorpower Limited  
Unit 2, Hurricane Close  
Sherburn In Elmet  
LS25 6PB  
UNITED KINGDOM



**T: +44 (0) 1977 688155**  
**F: +44 (0) 1977 688158**  
E: sales@yorpower.com  
W: www.yorpower.com

Yorpower Limited, Registered in England and Wales No. 7035780