





RATING	MODEL	ENGINE
148kVA Canopied Set	YXP148D6S	Perkins

GENERAL

OUTPUT RATINGS 60Hz,


Prime 148kVA, 118kW
Standby 163kVA, 130kW
ENGINE PERKINS 1006TAG
ALTERNATOR LEROY SOMER



TECHNICAL DATA				
Engine Model	1006TAG	Engine Speed	1800RPM	
Cylinders	6	Fuel Cons: 100% Load (I/hr)	37.6	
Displacement	5.99 Litres	Fuel Cons: 75% Load (I/hr)	28.9	
Coolant Capacity	37.2 Litres	Oil Capacity	19 Litres	
Cooling	Water Cooled	DBA @ 7M	62.8	
Fuel Tank Capacity	420	Intake System	Turbocharged	

These ratings are suitable for Prime Continuous power output at varying load with no limitation on annual hours of operation.

The Generator will supply 10% overload for 1 in 12 hours.

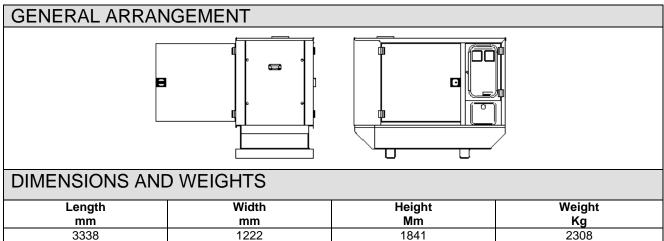

We reserve the right to amend specifications without notice. All ratings are at standard ISO conditions

Alternators may vary subject to lead time and availability

Registered Office: Yorpower Limited Unit 2, Hurricane Close Sherburn In Elmet LS25 6PB UNITED KINGDOM



T: +44 (0) 1977 688155 F: +44 (0) 1977 688158

E: sales@yorpower.com W: www.yorpower.com